


Erupt Cable Guide



Erupt cables and jacks use the CTIA standard common in many modern devices.


Cables that do not follow the orientation shown here may not work with Erupt.

Erupt cups utilize a 2.5mm jack.

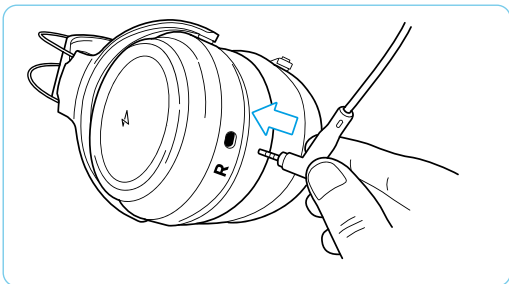

When using aftermarket cables, you must ensure that the cable wiring is compatible with the wiring in the Erupt jack.

Is the cable compatible?

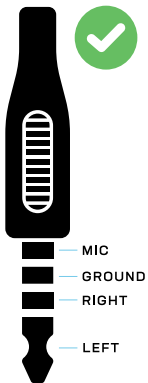

GOOD

The following 4 pin, CTIA configuration is compatible. Erupt was designed with this standard to avoid mic interference and user-error.

Note: standard stereo cables may work, however they have not been tested by us.



BAD

Mono jacks are not compatible with Erupt. Using a mono jack cable will result in the right channel and ground pin shorting together.